



## Realtrack Models


### Body removal instructions

Carefully put the thin blade in-between the body and the chassis to prise the body away from the locating clips

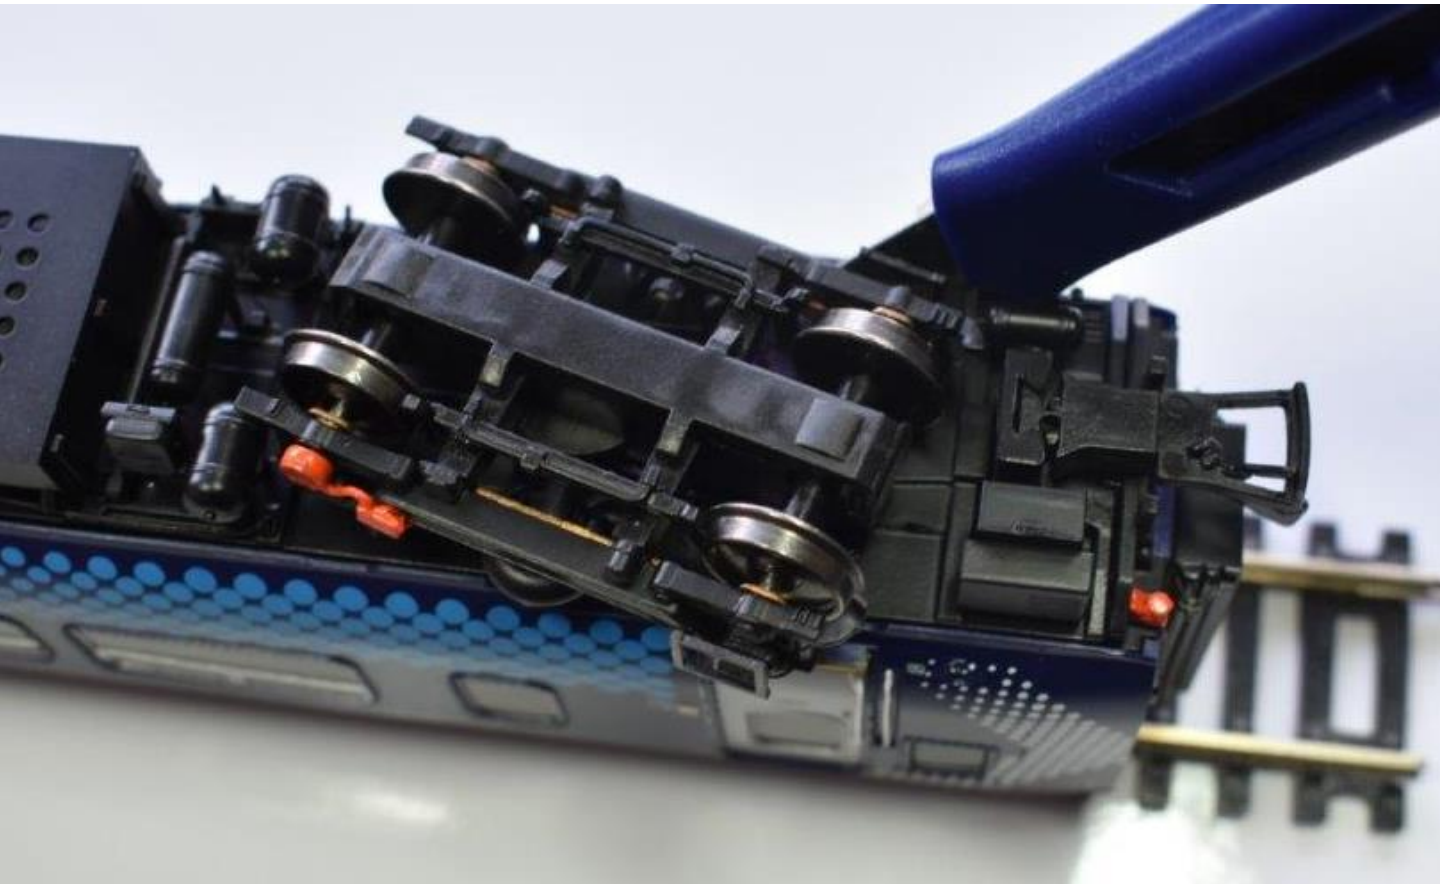


Prise up the chassis for the body taking care that nothings snagged

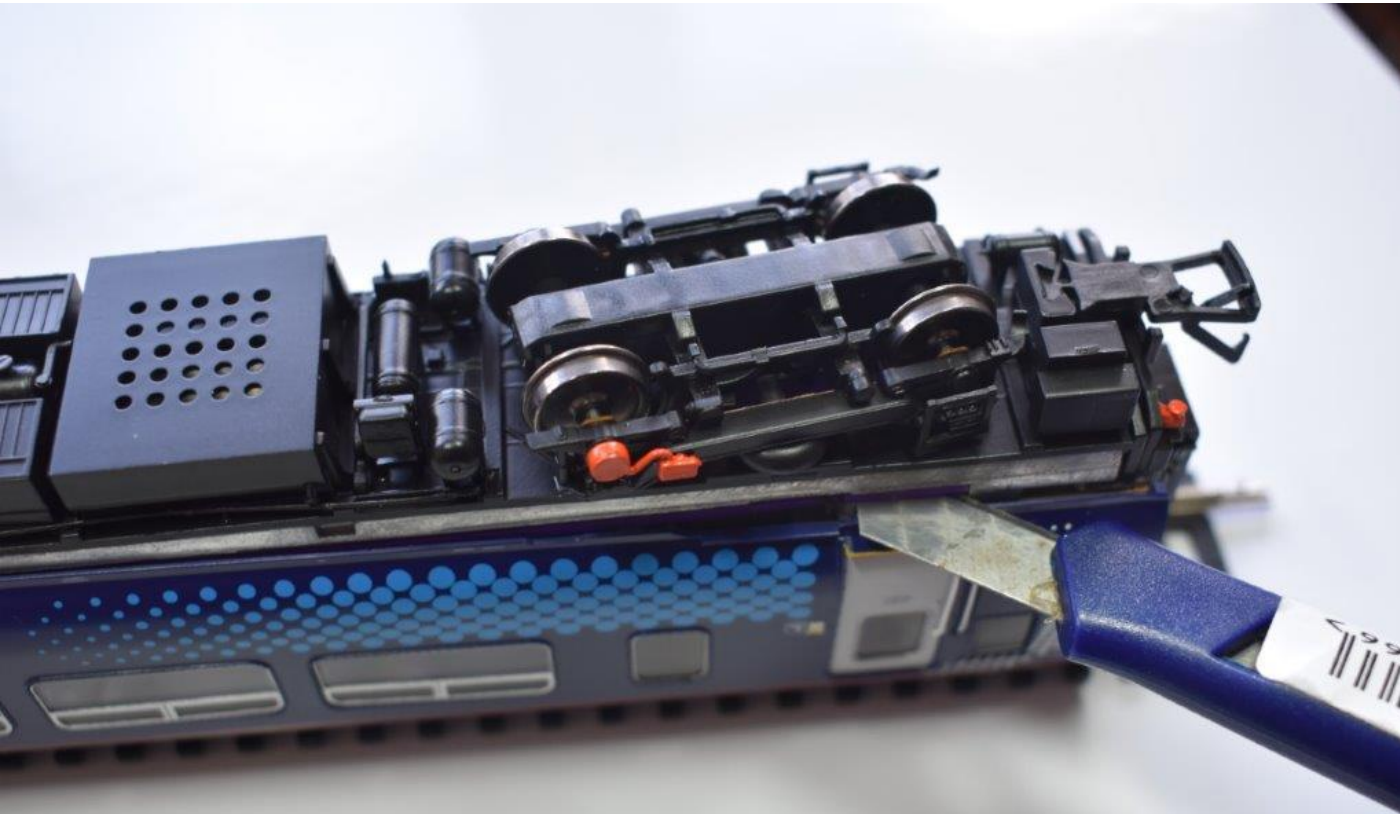


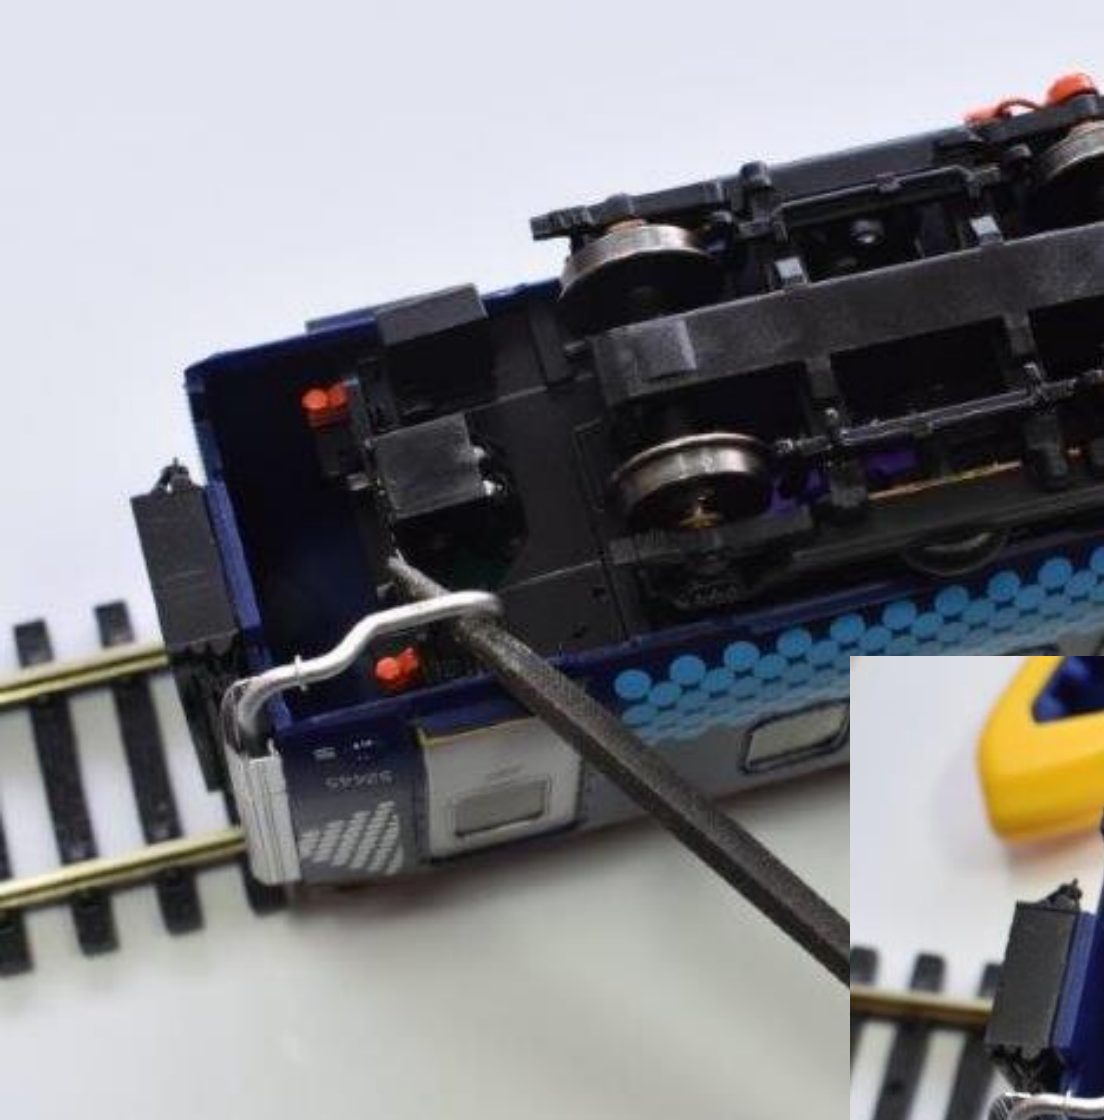


Remove the exhaust from the floor of the unit and once clear slide the chassis out as shown in the pictures

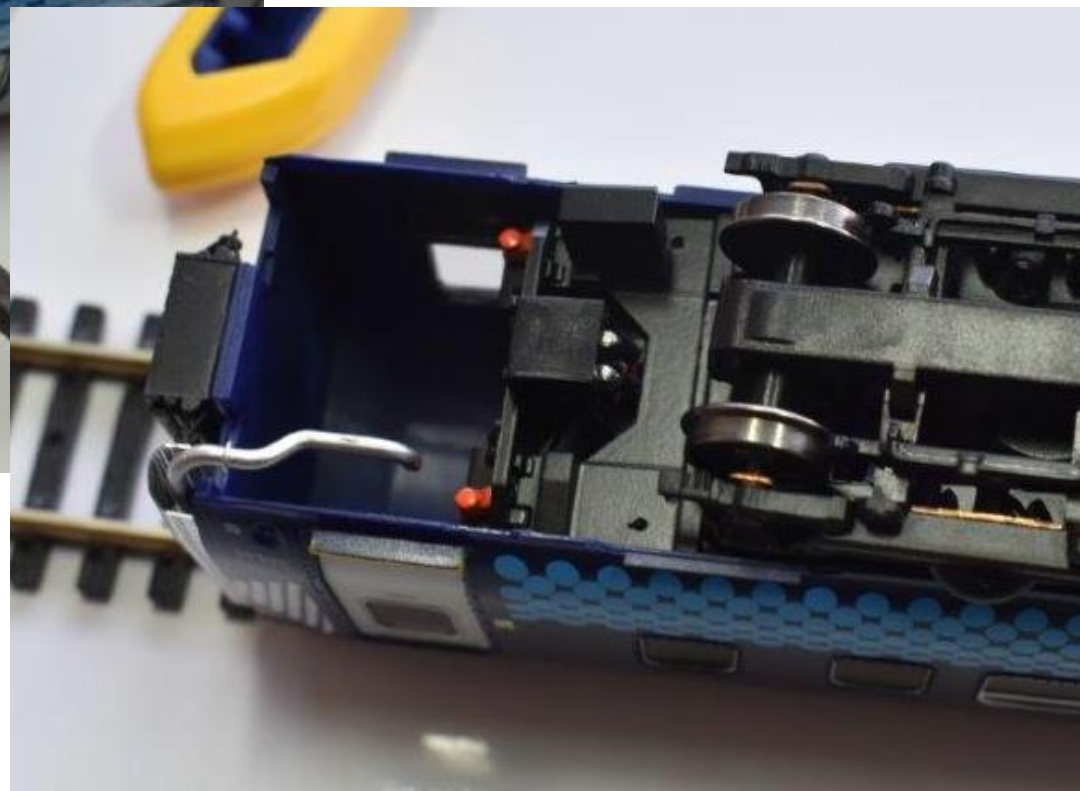



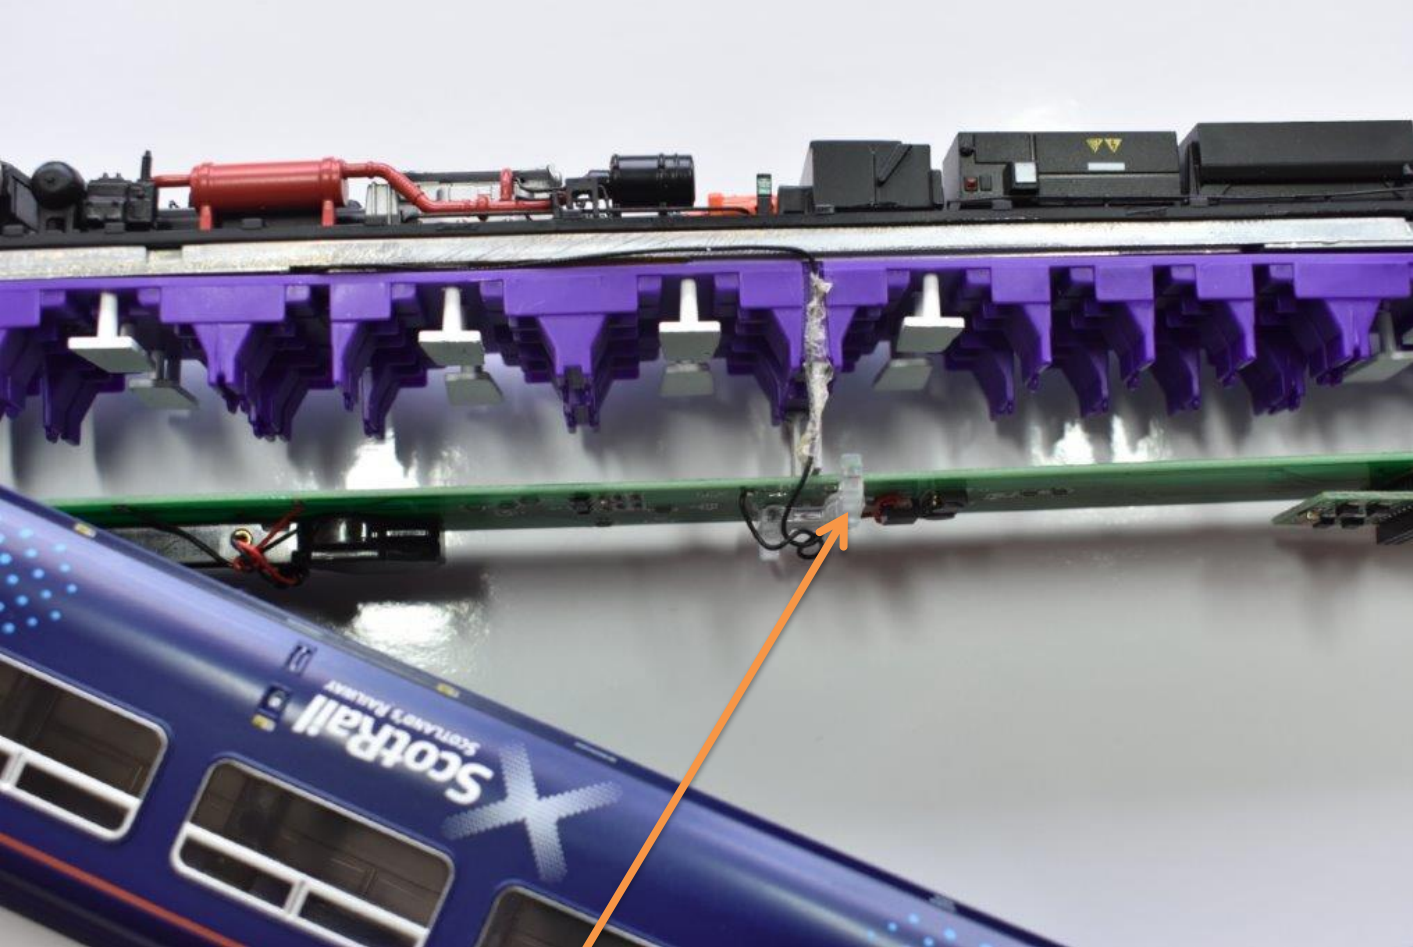

When removing the body take great care not to break the side door indicator light pathways , this is achieved by gently easing the body sides apart slightly when releasing the body.

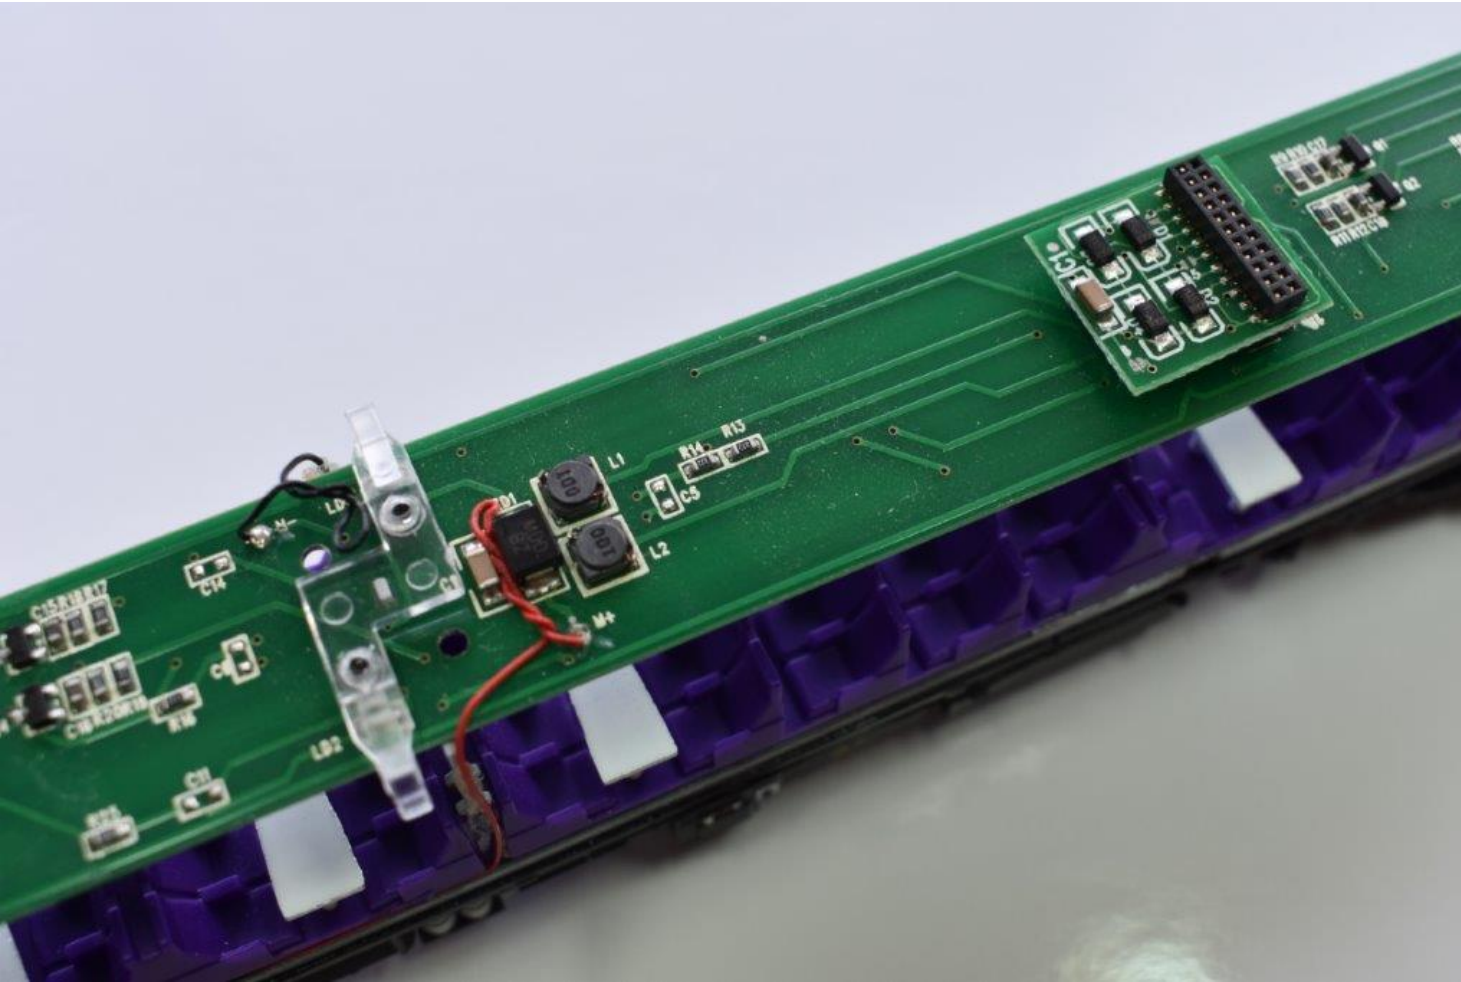

The decoder (sound or non sound decoder) should be fitted in the same position as the dcc blanking plug Eg the overhang of the decoder always faces to the centre of the unit